
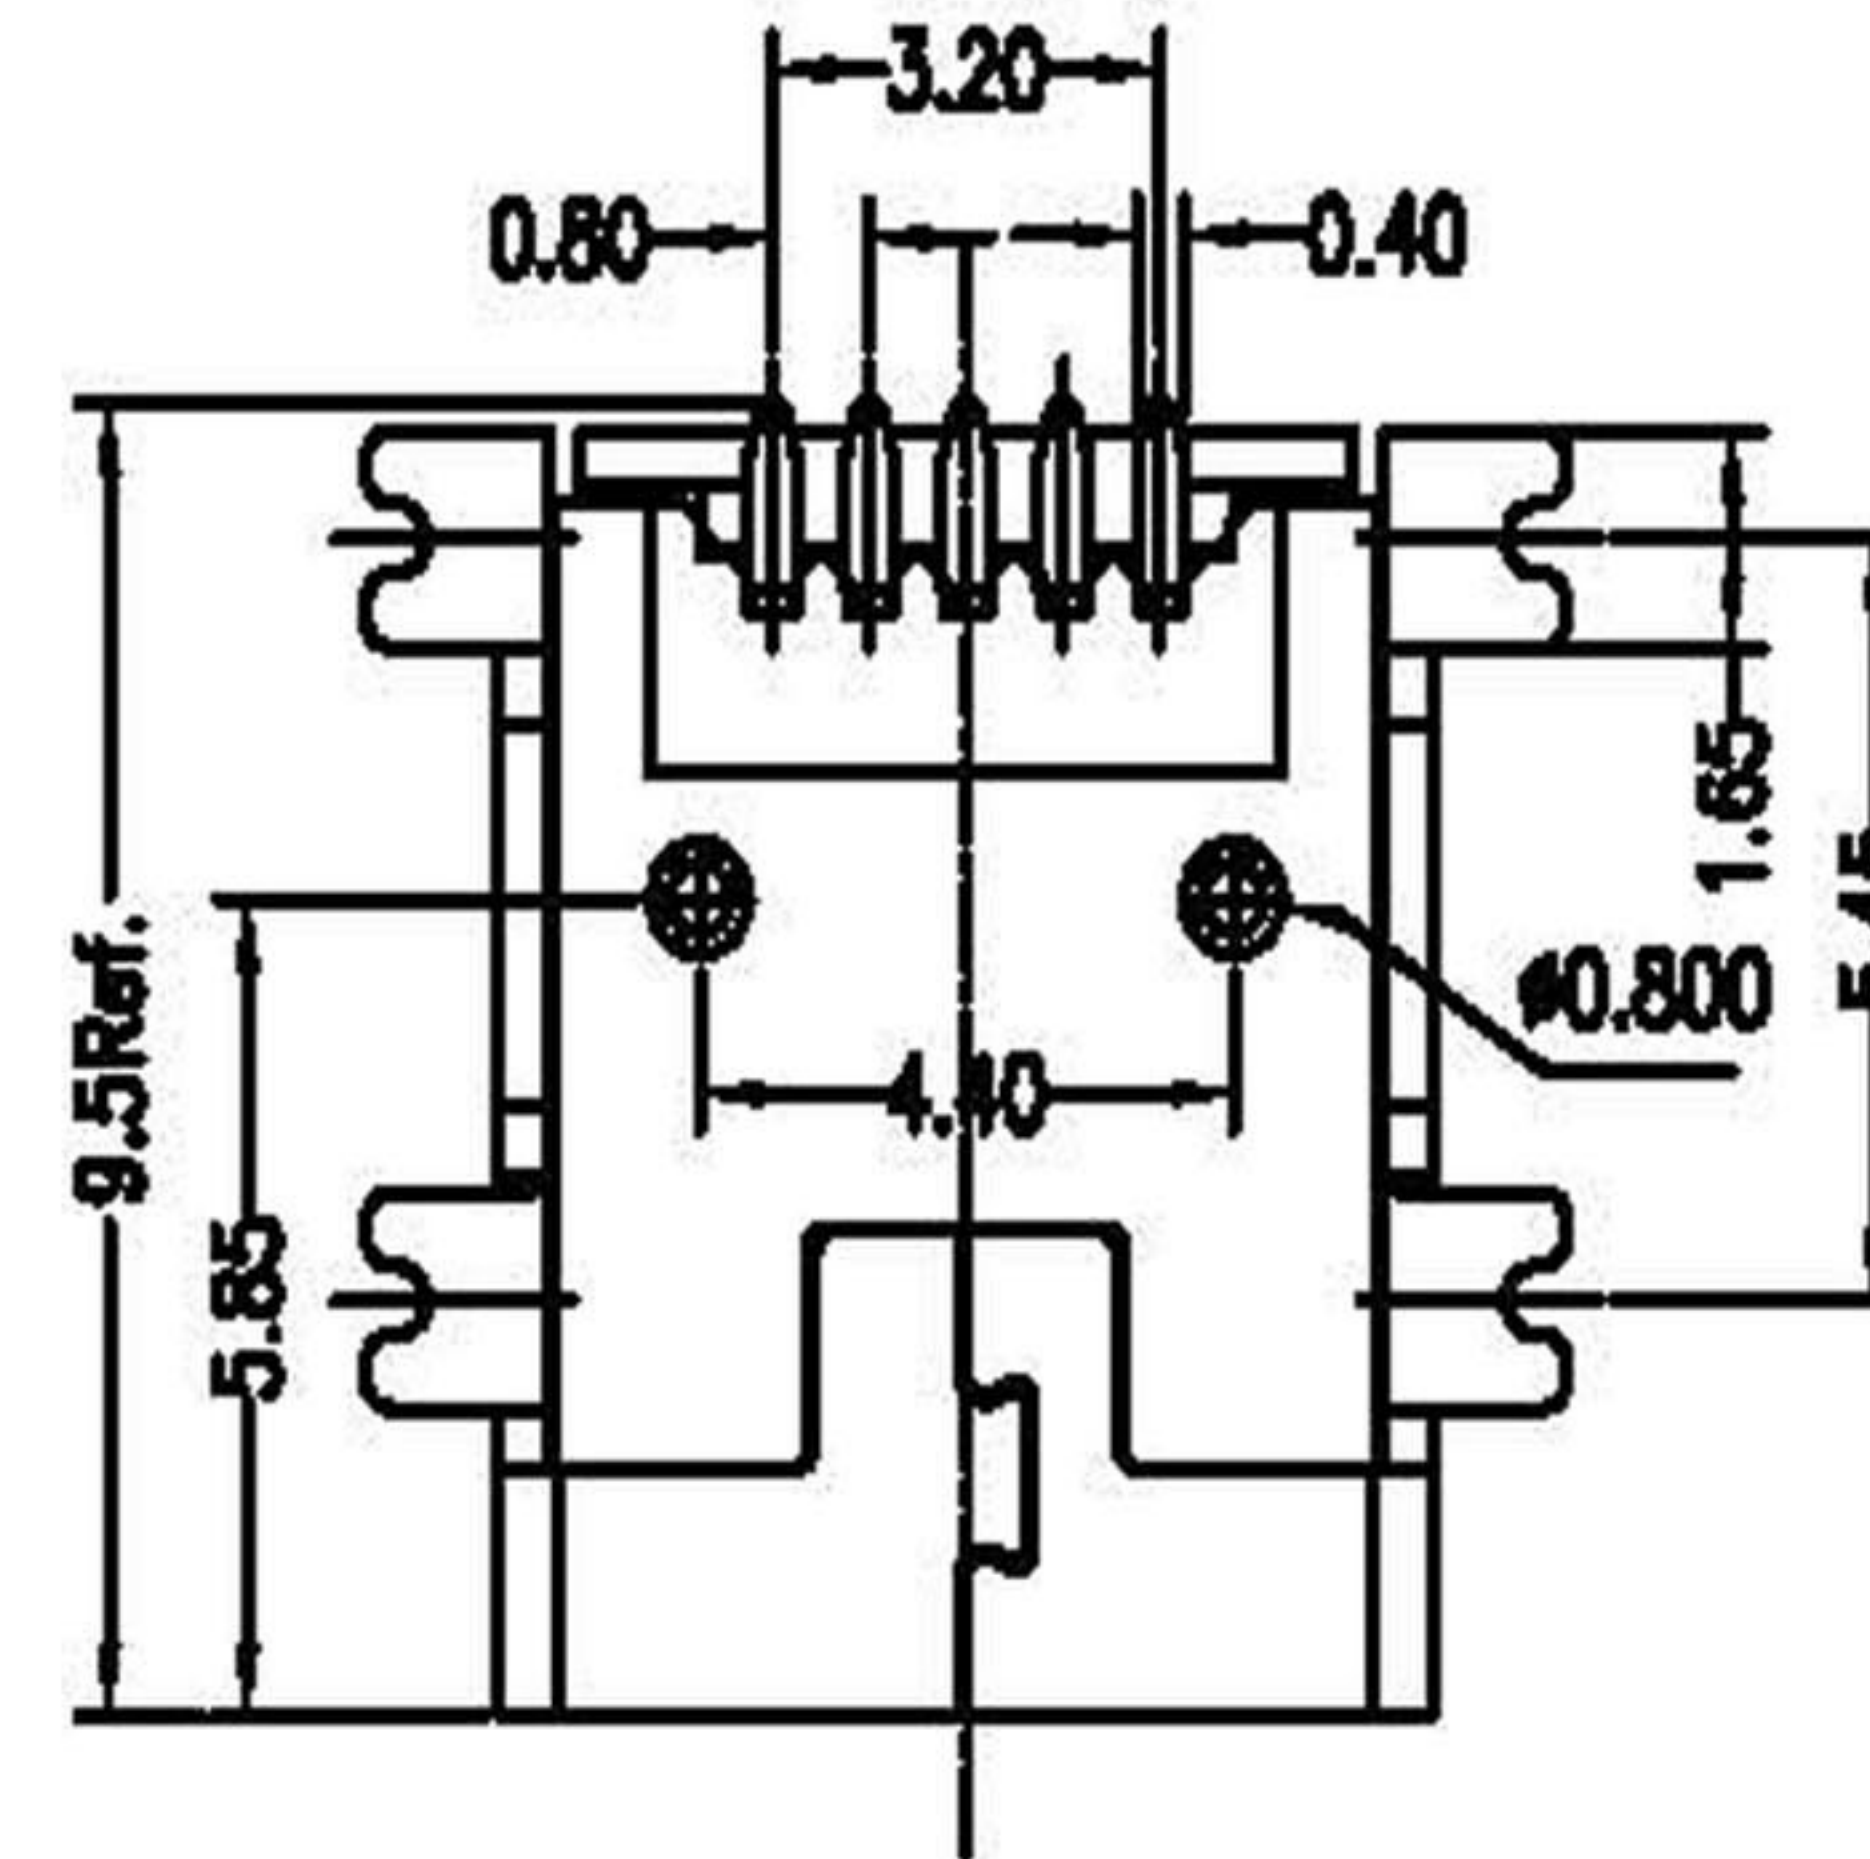
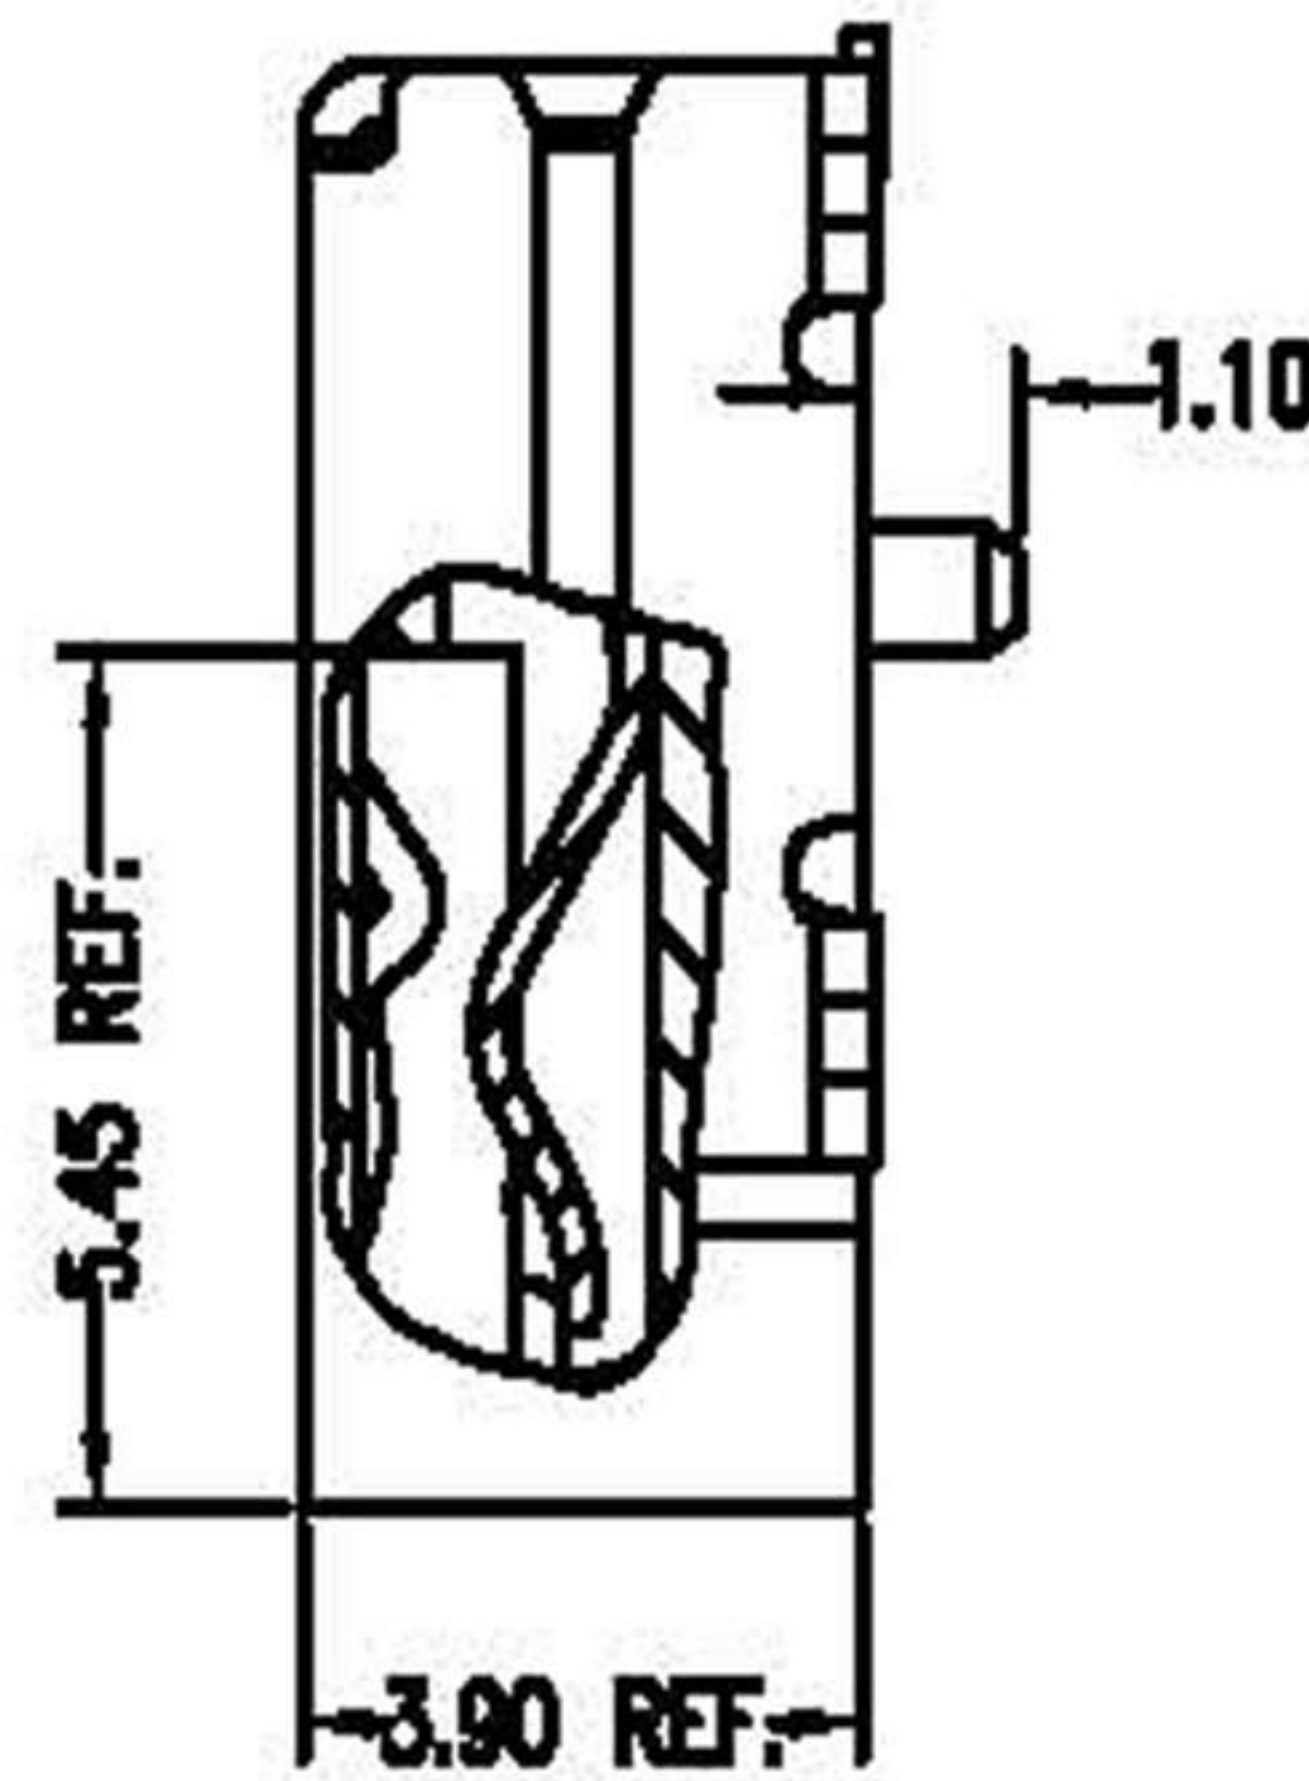


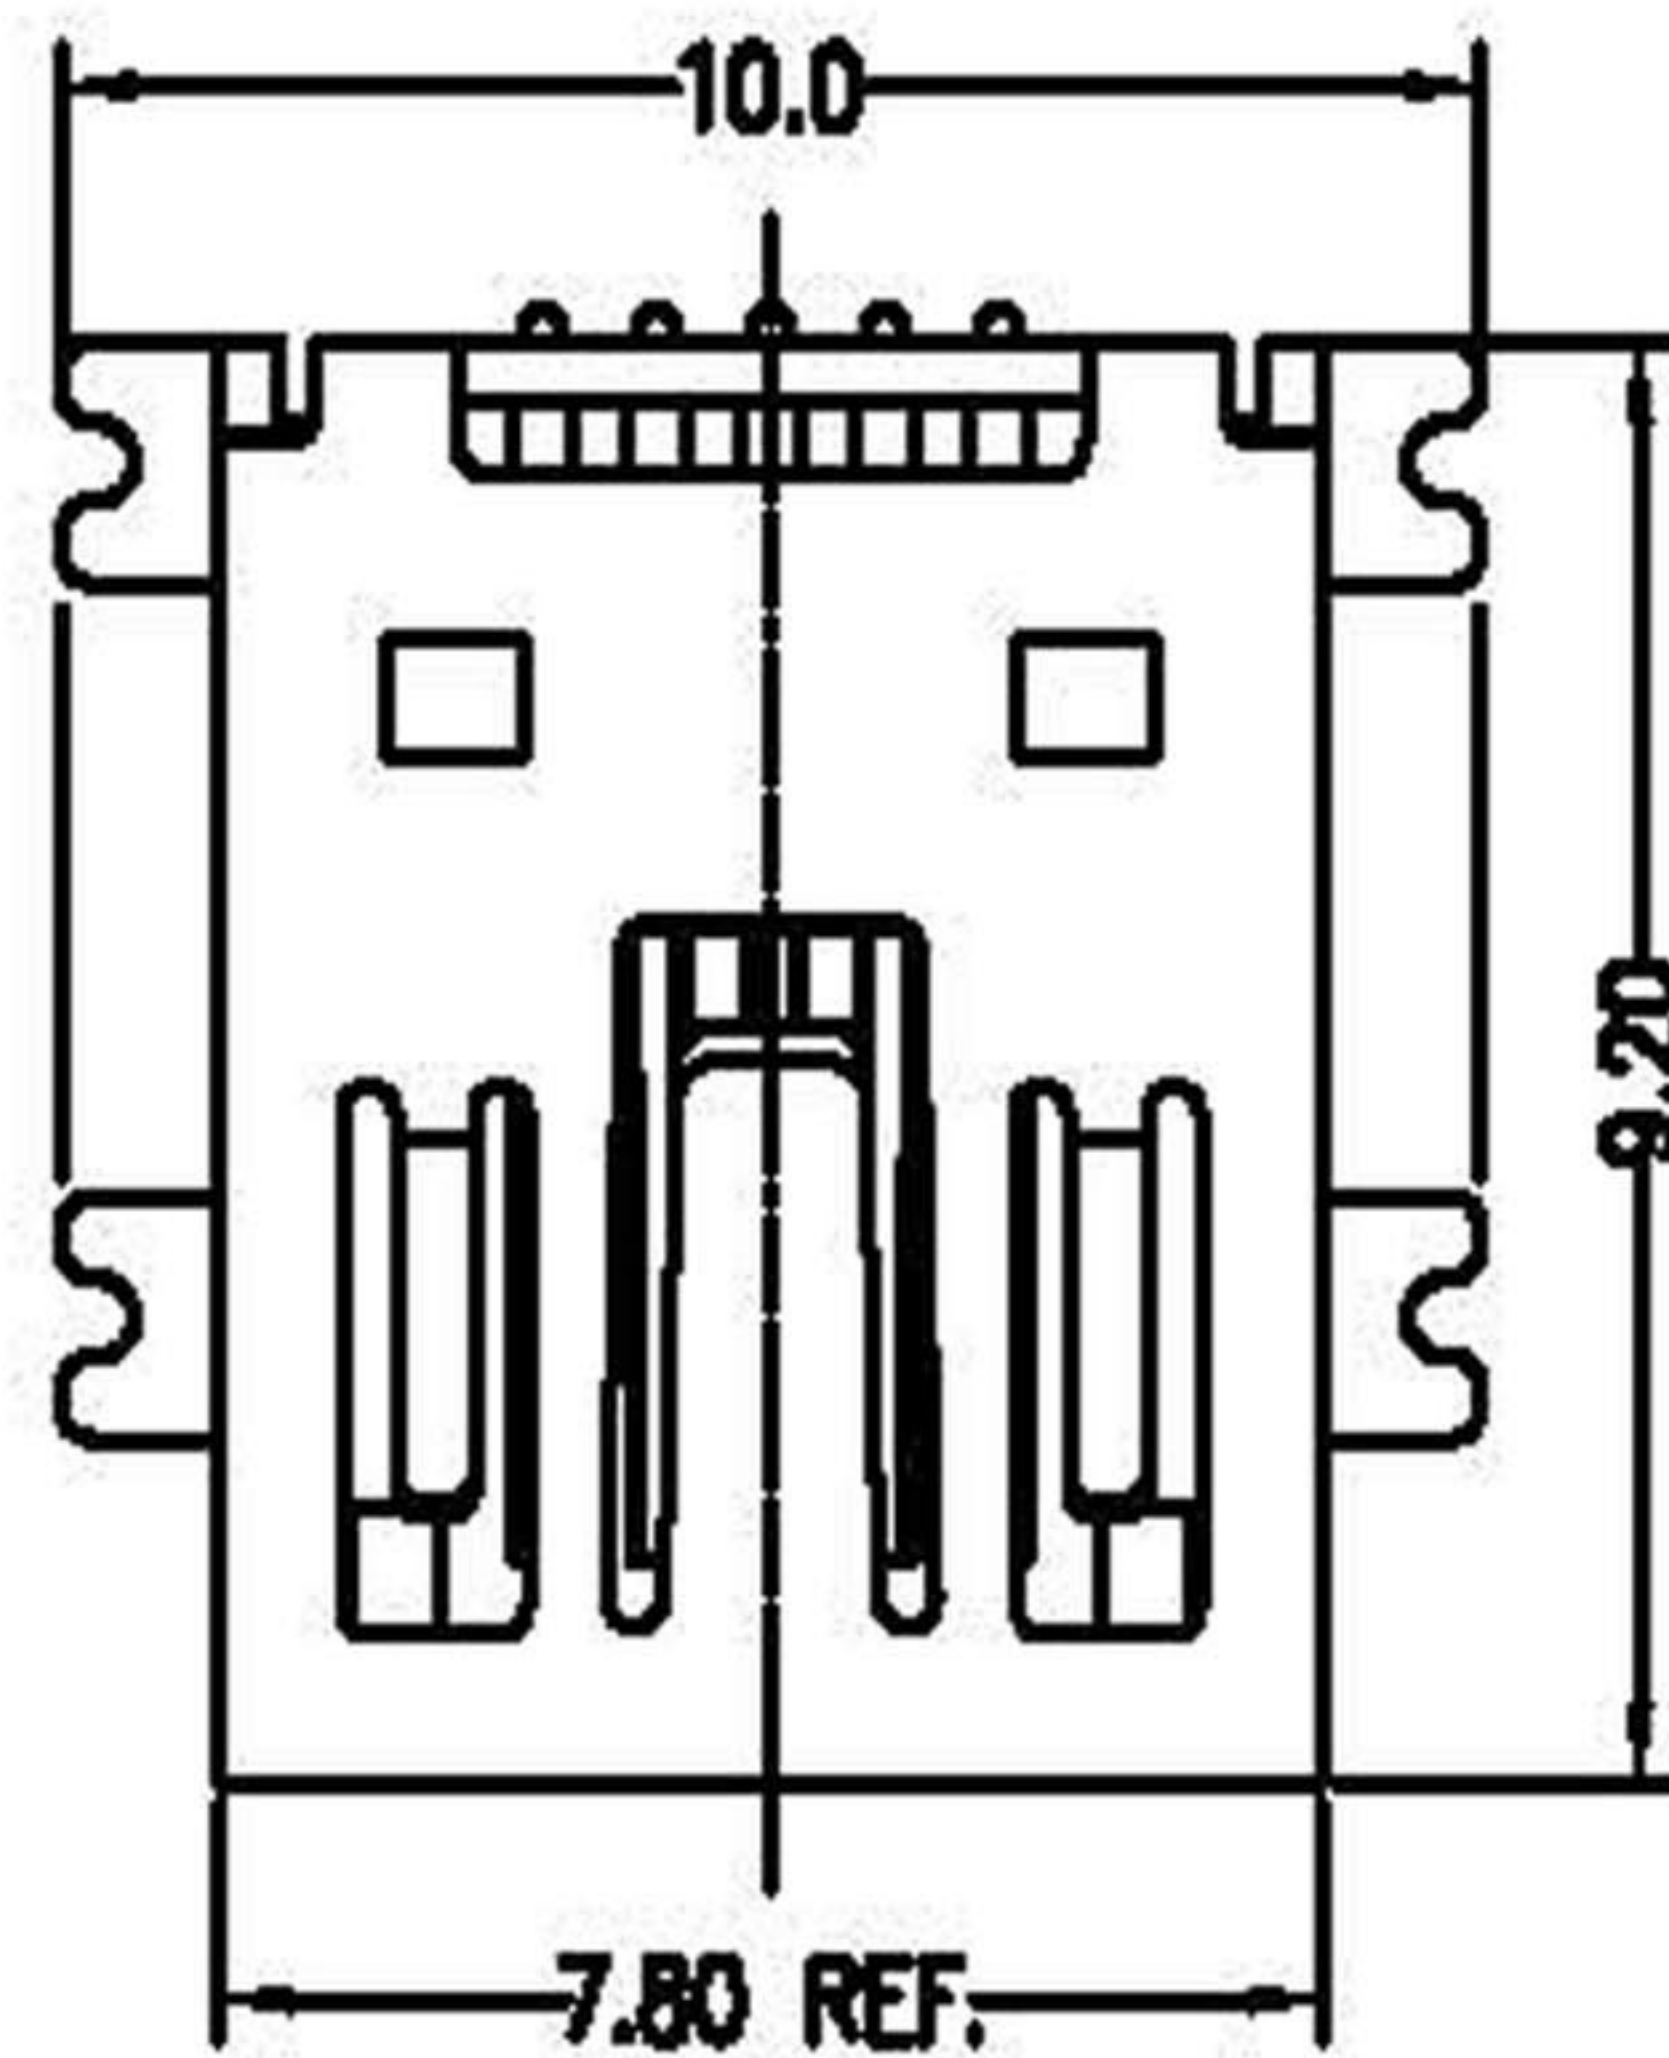

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1.5Amperes.

Dielectric Withstanding Voltage: AC 100V at sea level.

Insulation Resistance: 100Megohms Min.

Contact Resistance: 30Milliohms Max.

Operating Temperature: 0°C to +50°C

MECHANICAL CHARACTERISTICS

Total Mating Force: 3.57 kgf. Max.



Total Unmating Force: 0.71 kgf. Min.

MATERIAL

Contacts: Copper Alloy.

Insulator: Lcp.

Shell: Copper Alloy.

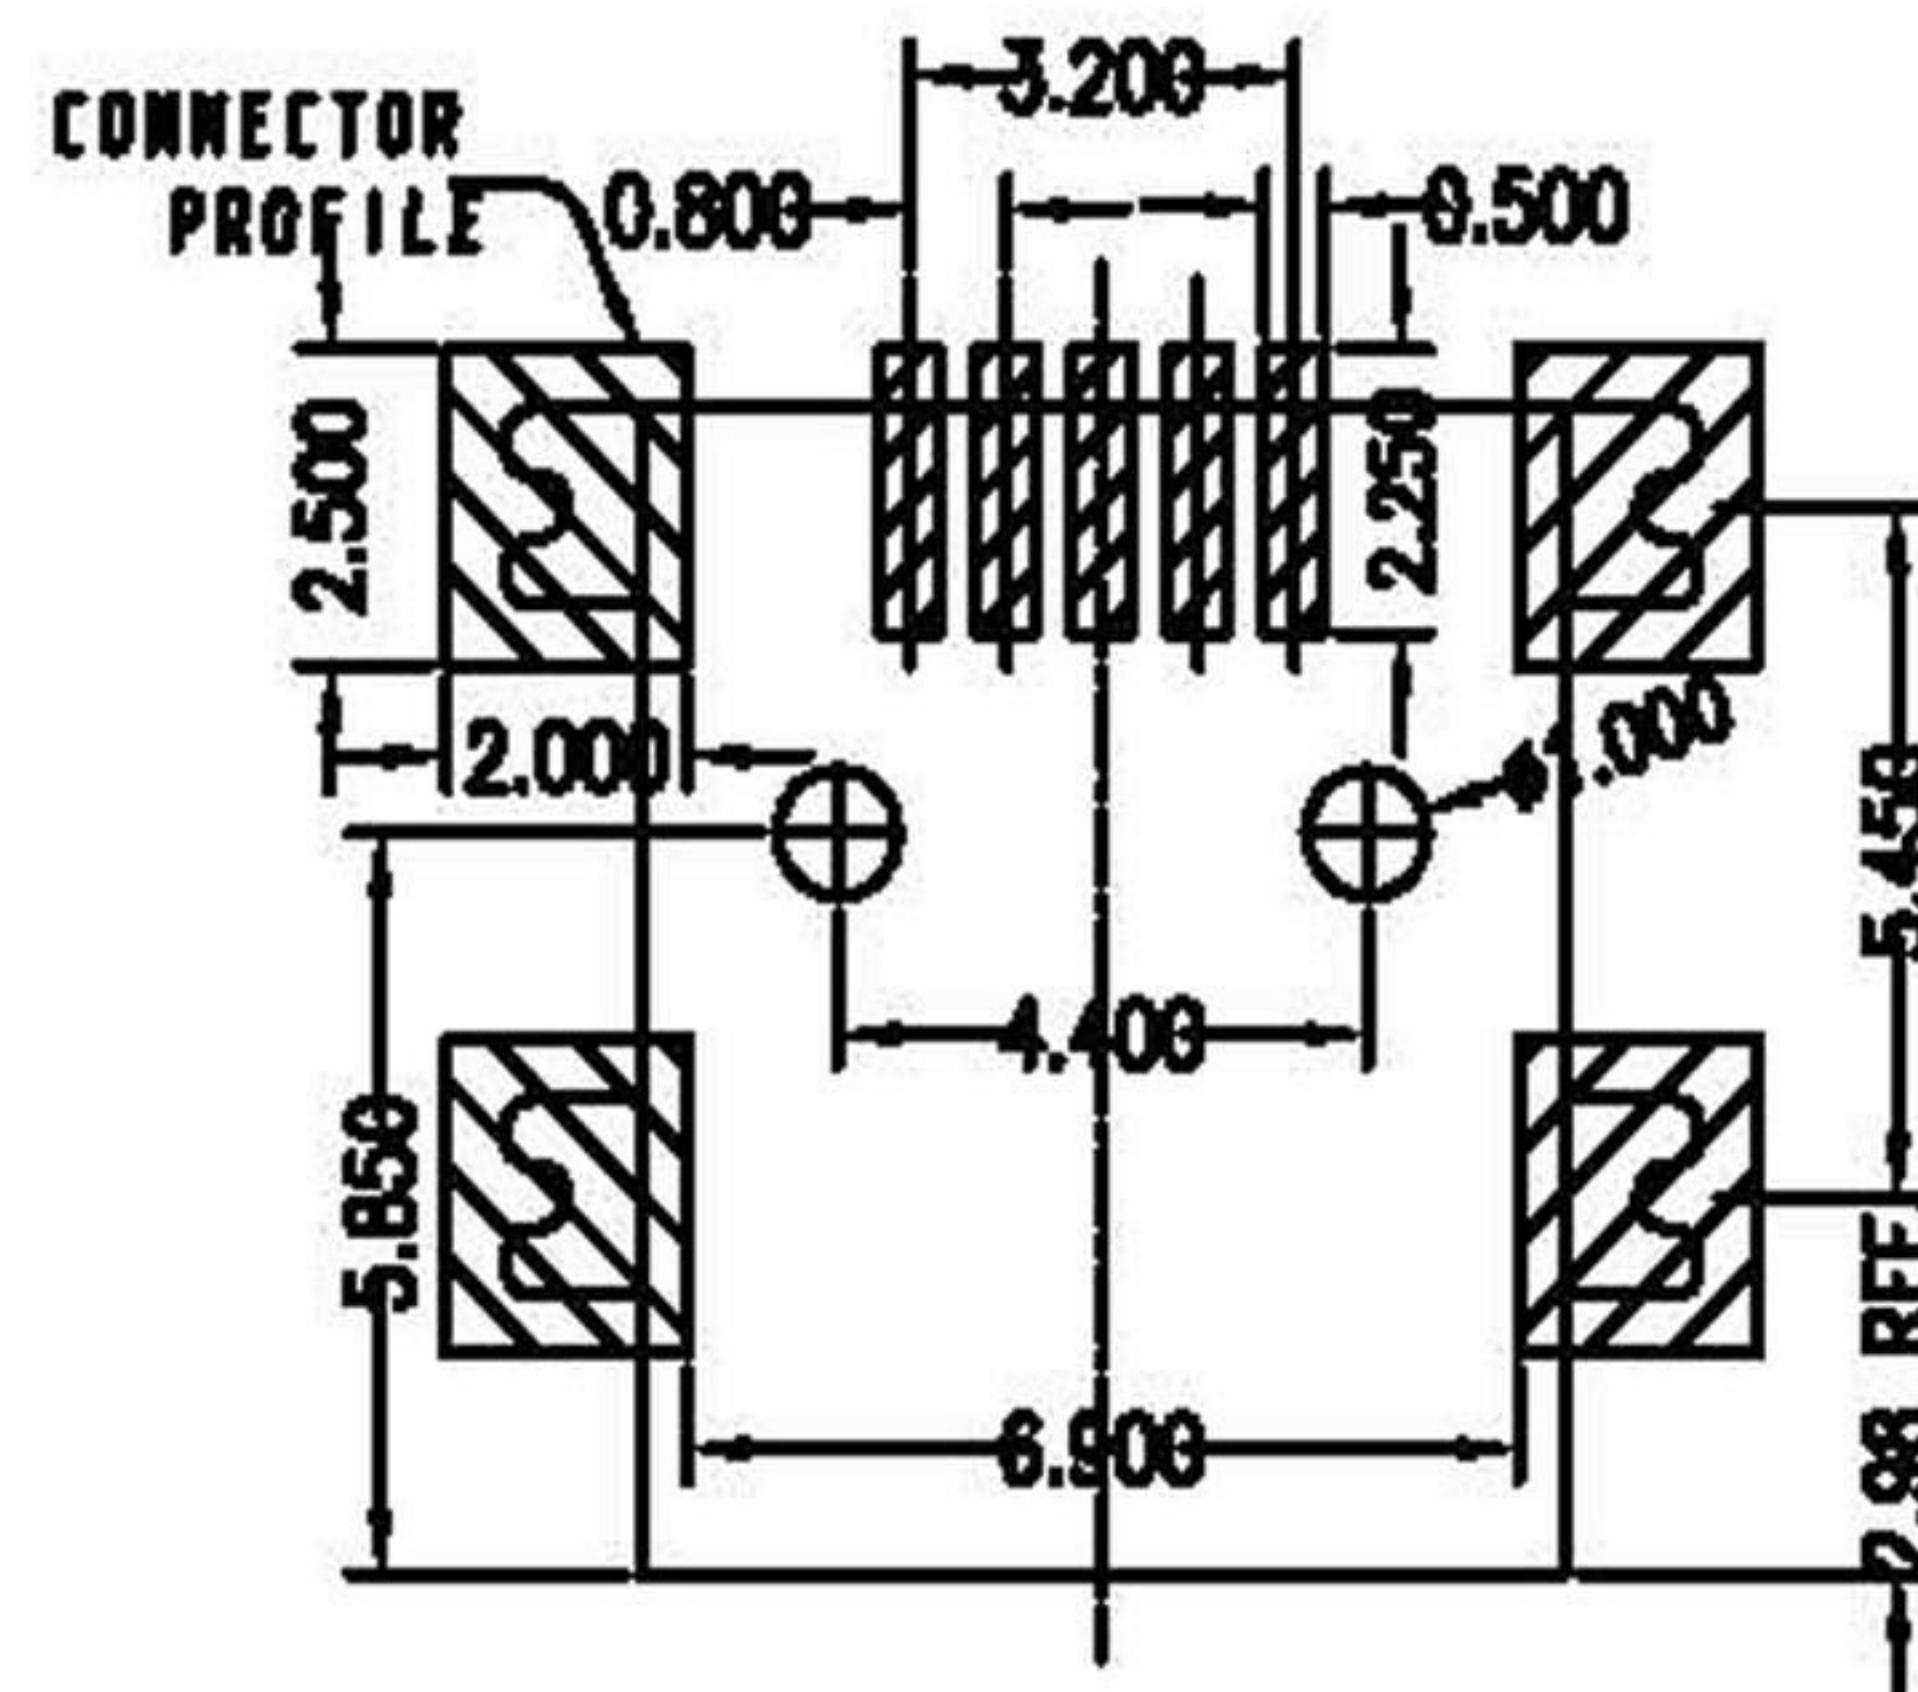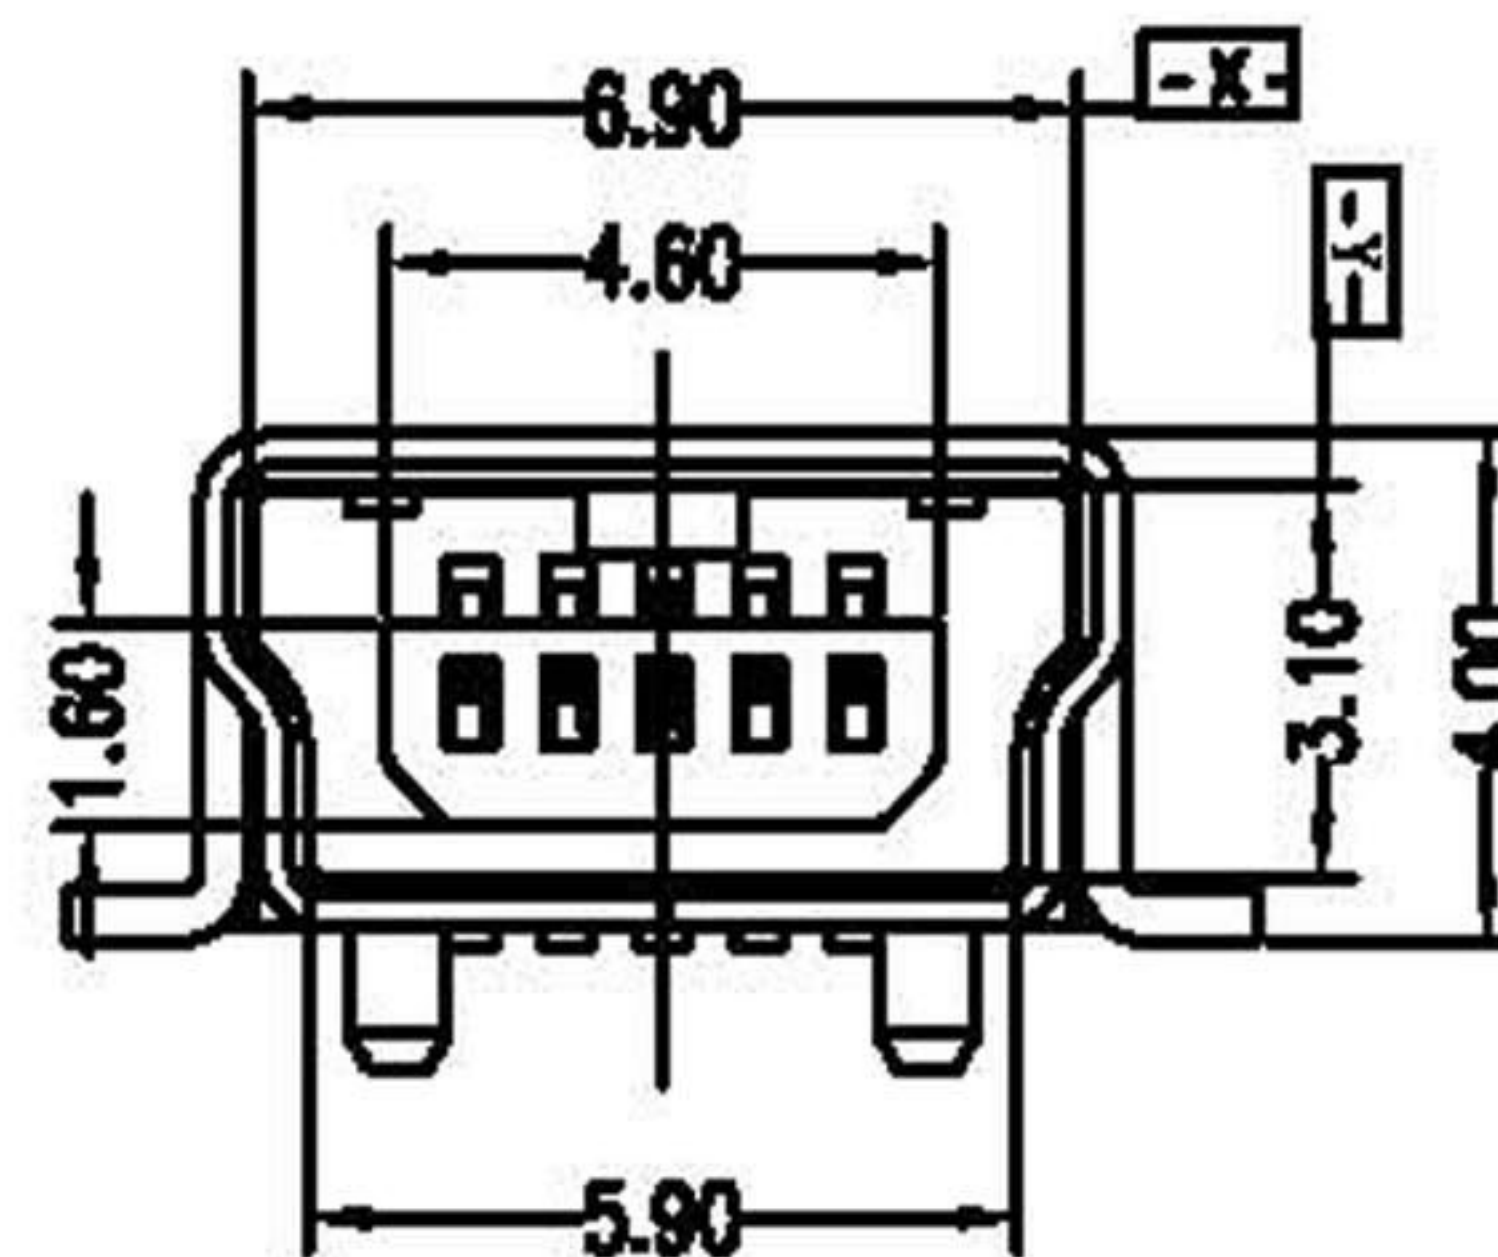

TOLERANCES: ± 0.10
RECOMMEND PCB LAYOUT


RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日
2008/04/21

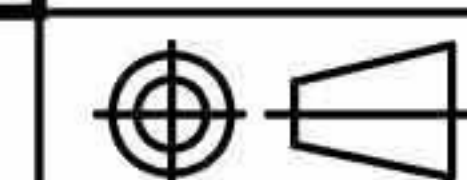

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差

.0 ± 0.3
.00 ± 0.25
ANG. $\pm 2^\circ$

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

MINI USB(1.1) 5P FEMALE P.C.B. SMT TYPE

PLASTIC POLARIZING PES 4.4mm BLACK INSULATOR ROHS LOW-LEAD

PART NO.

料號