

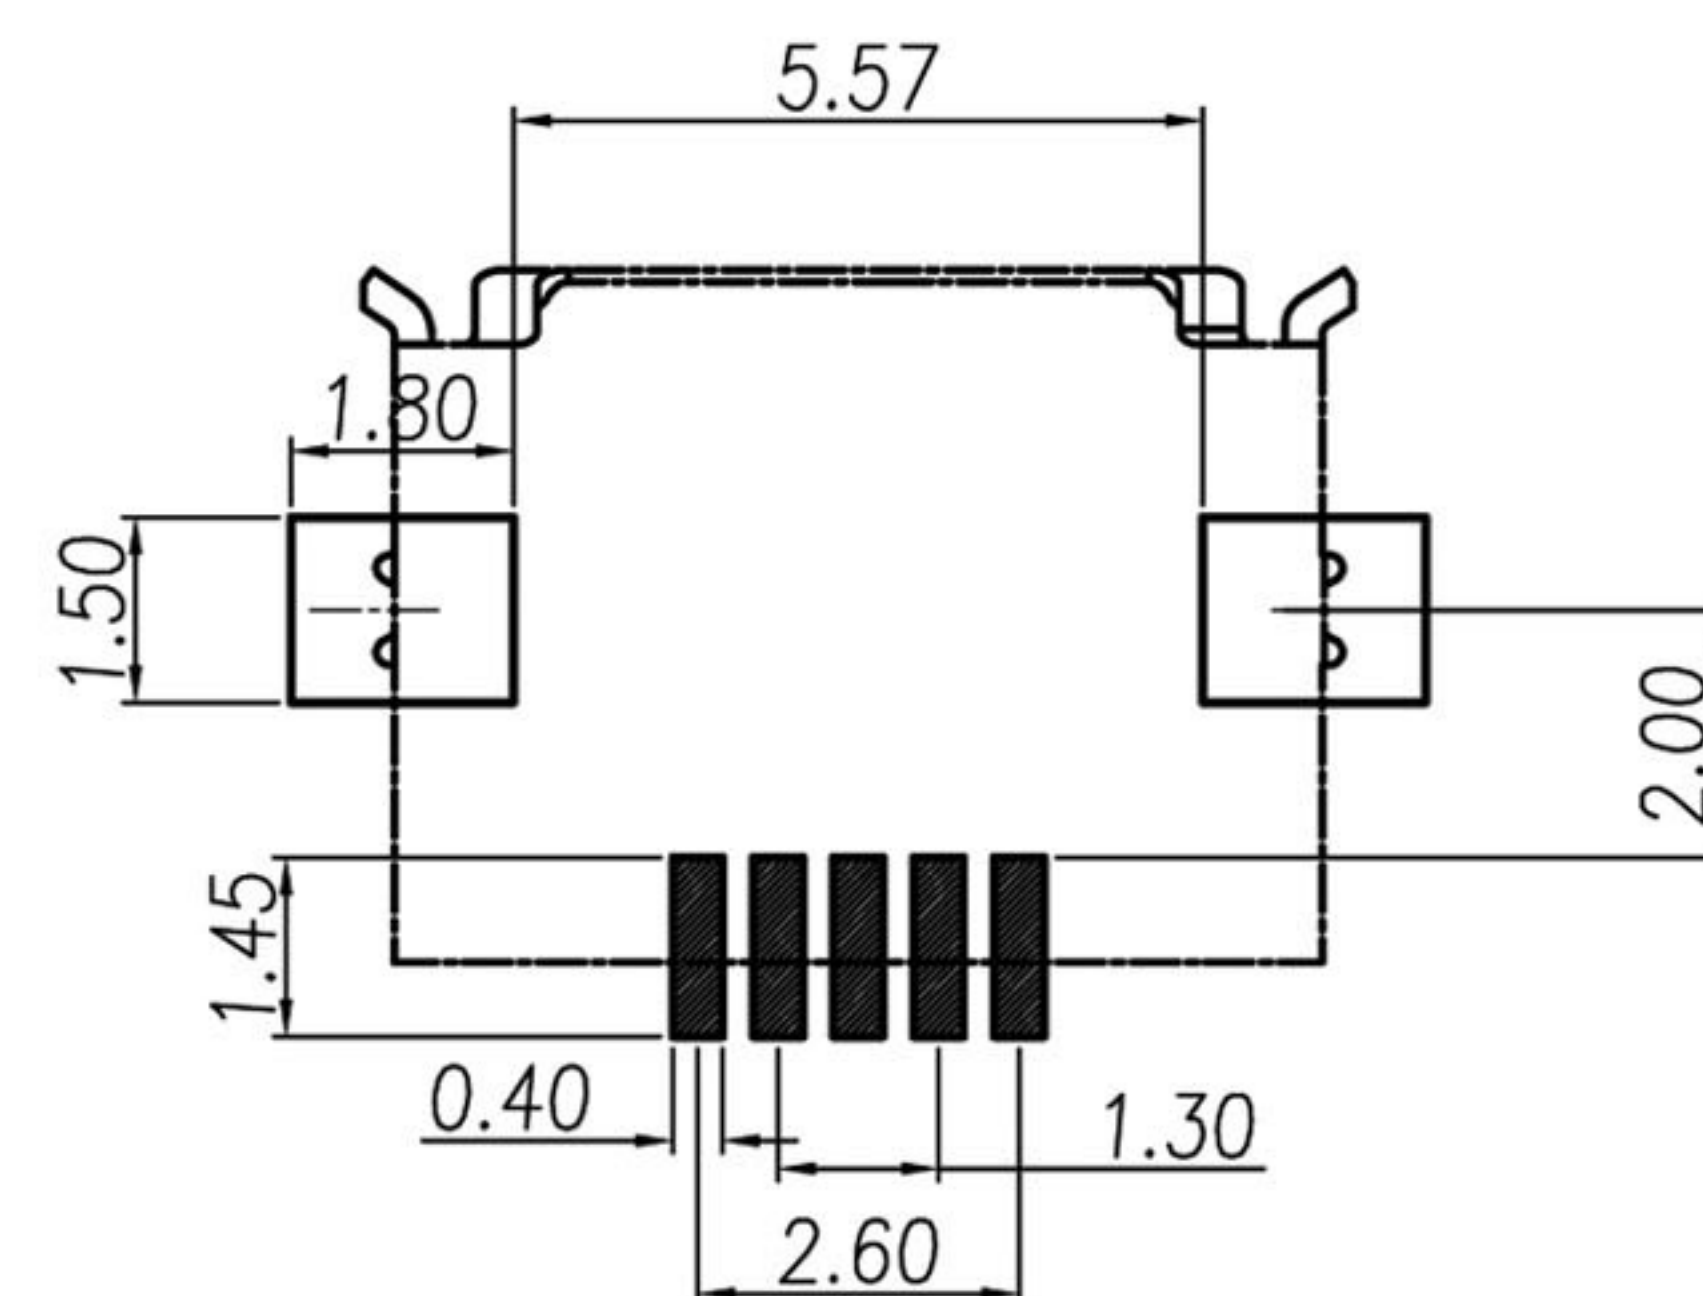
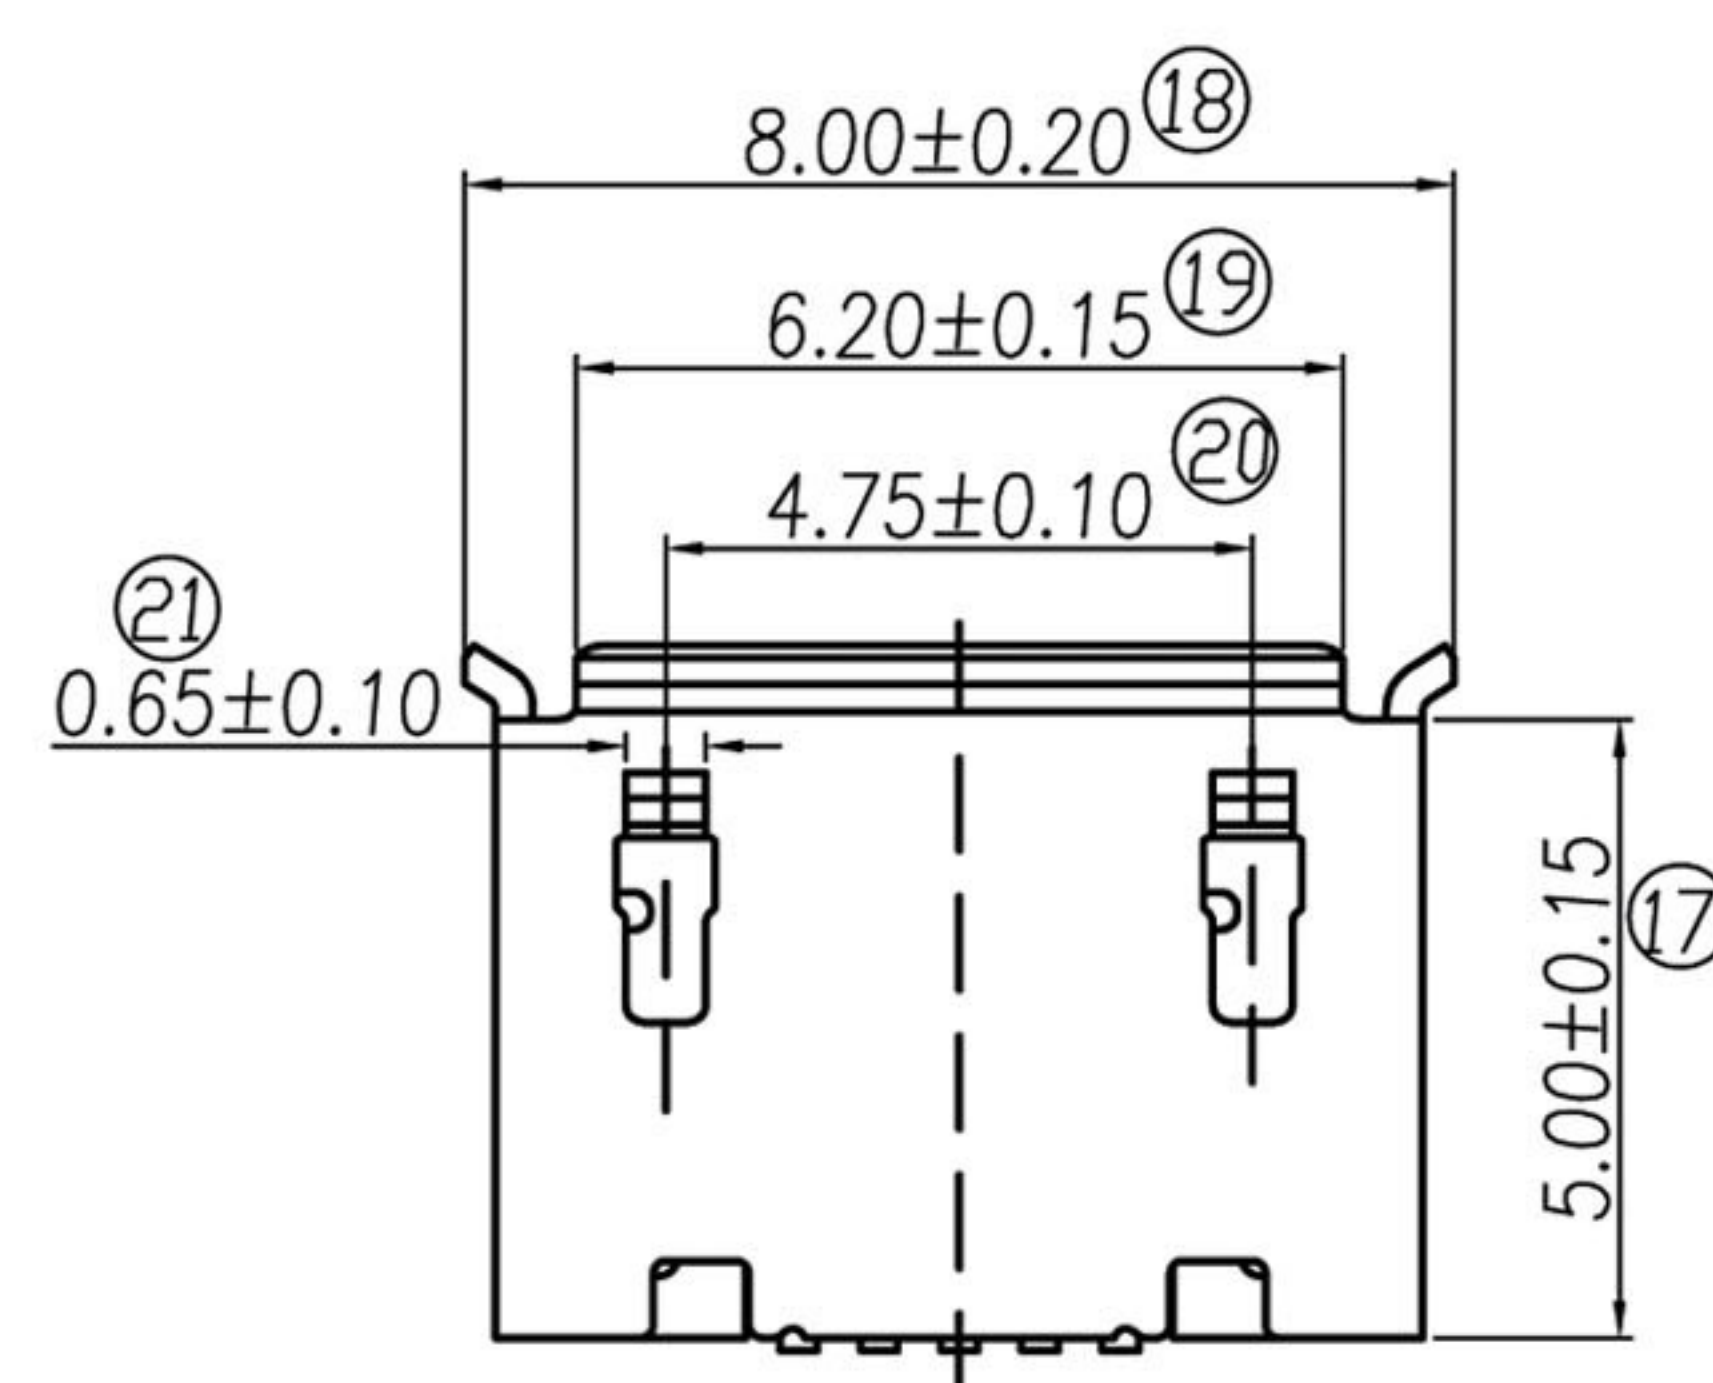
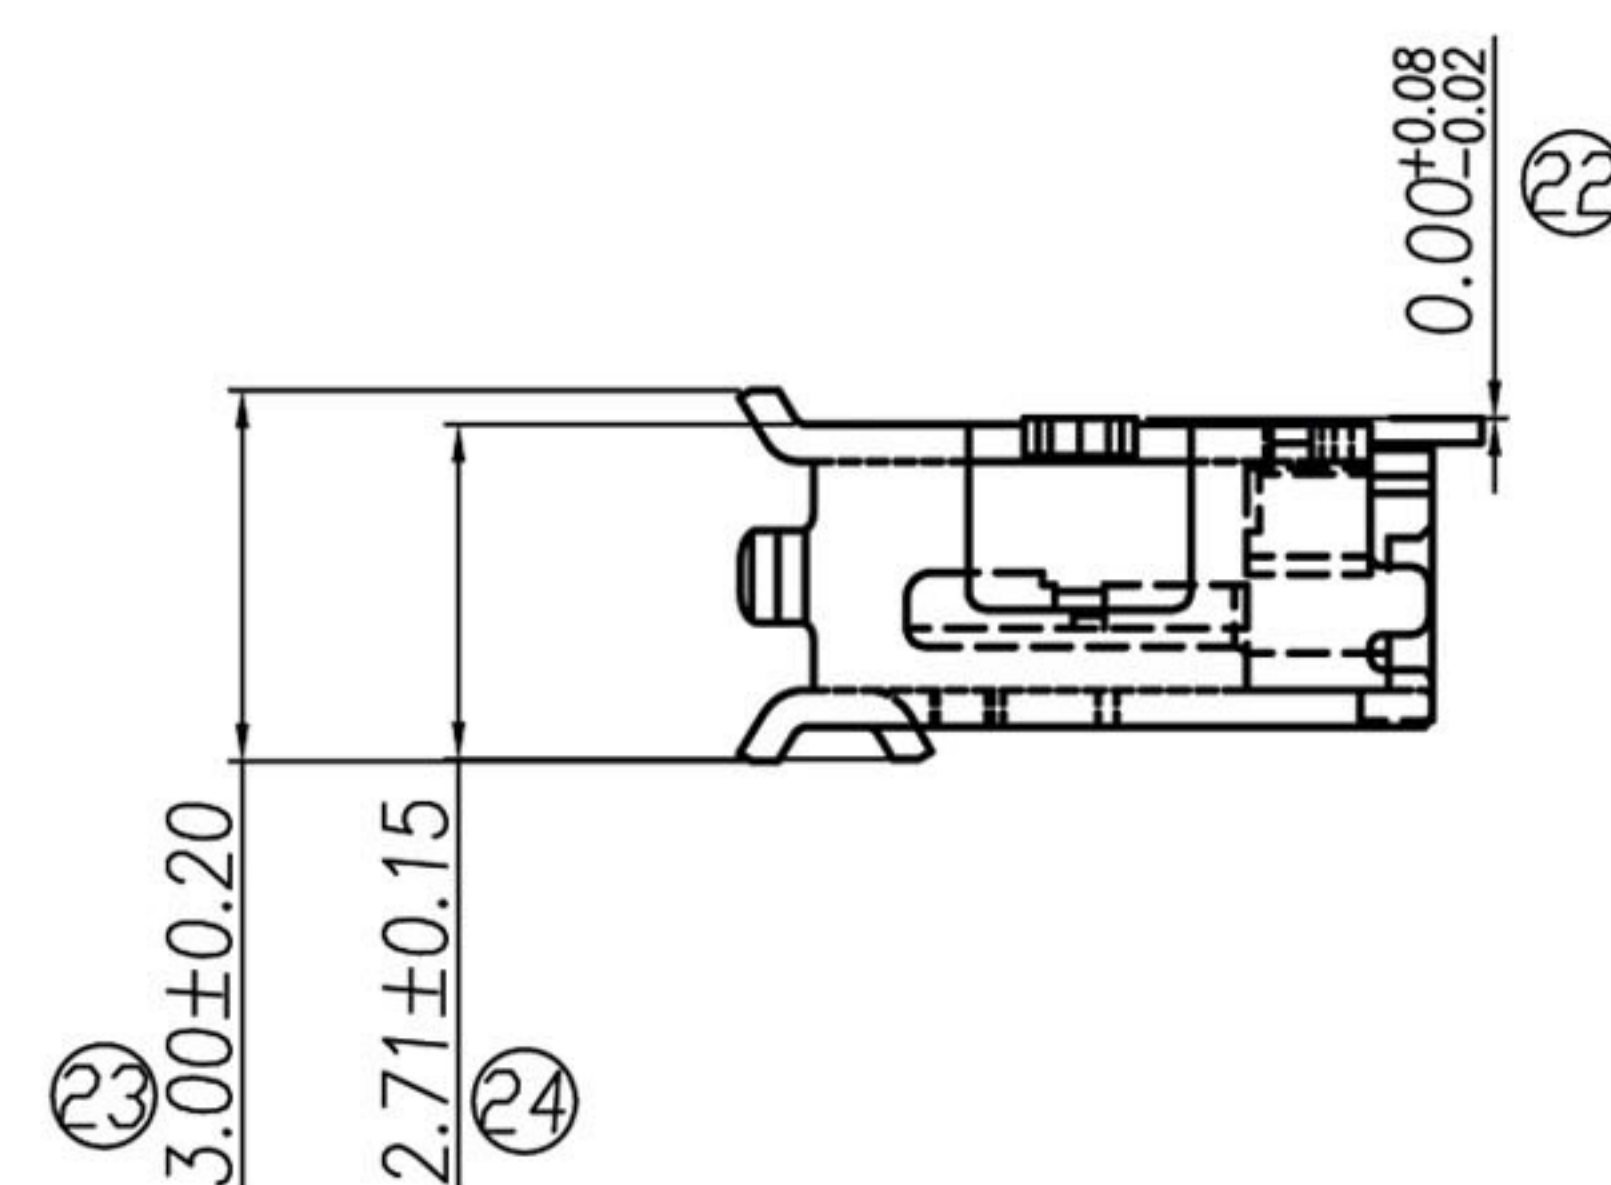
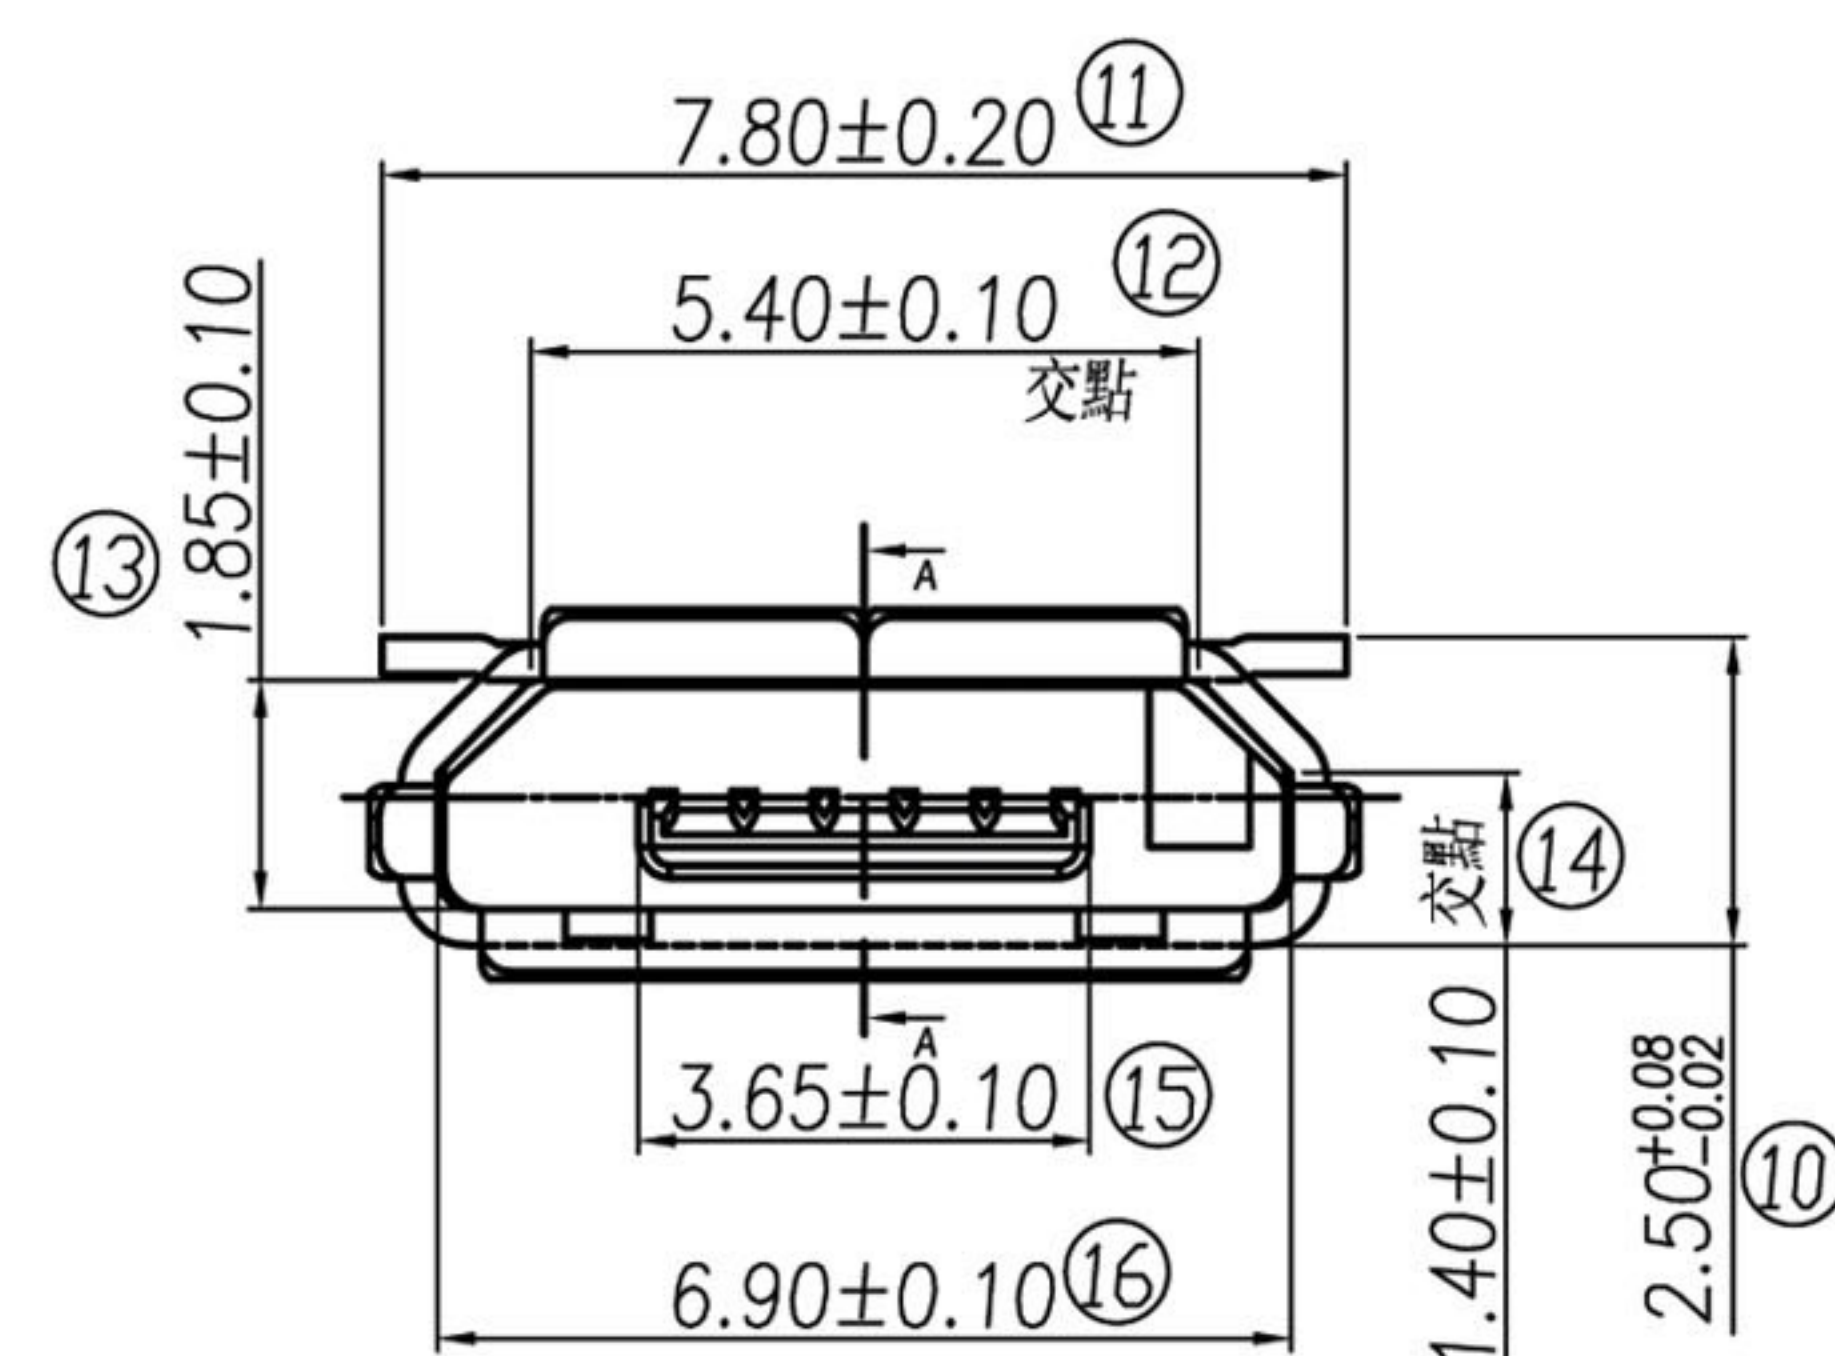
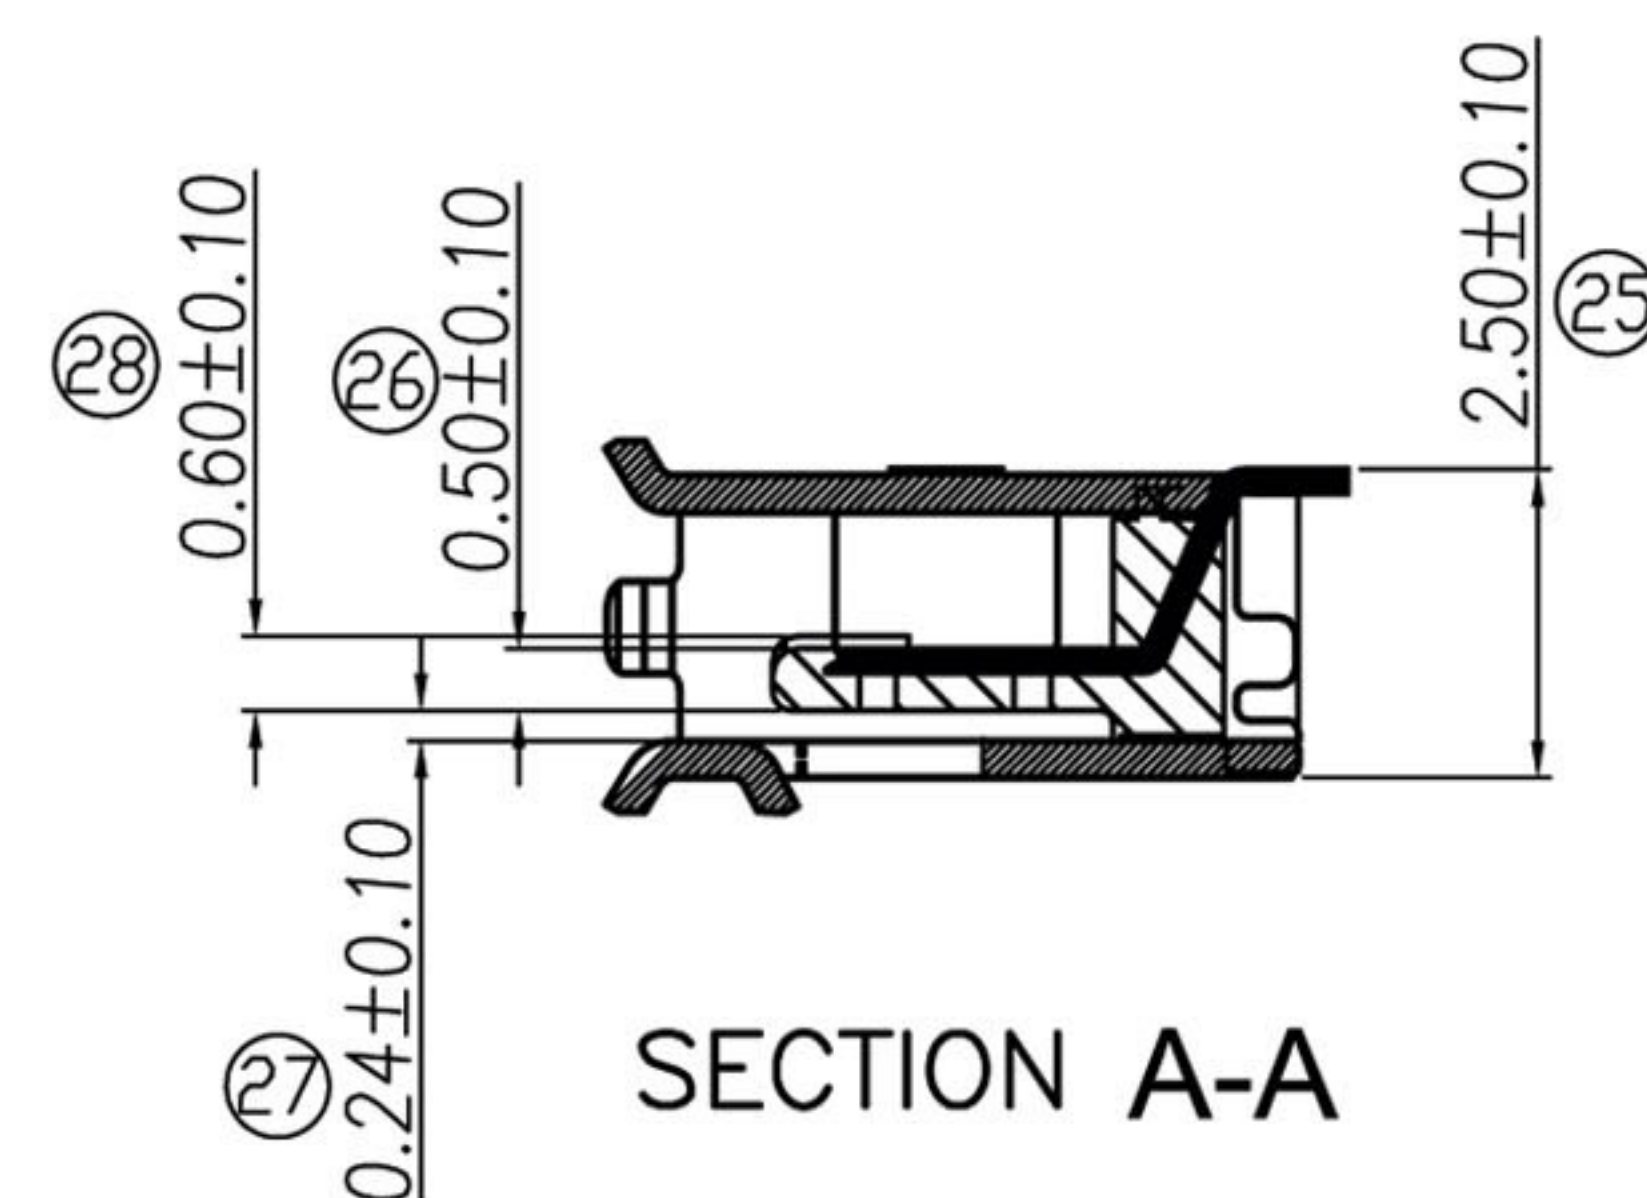


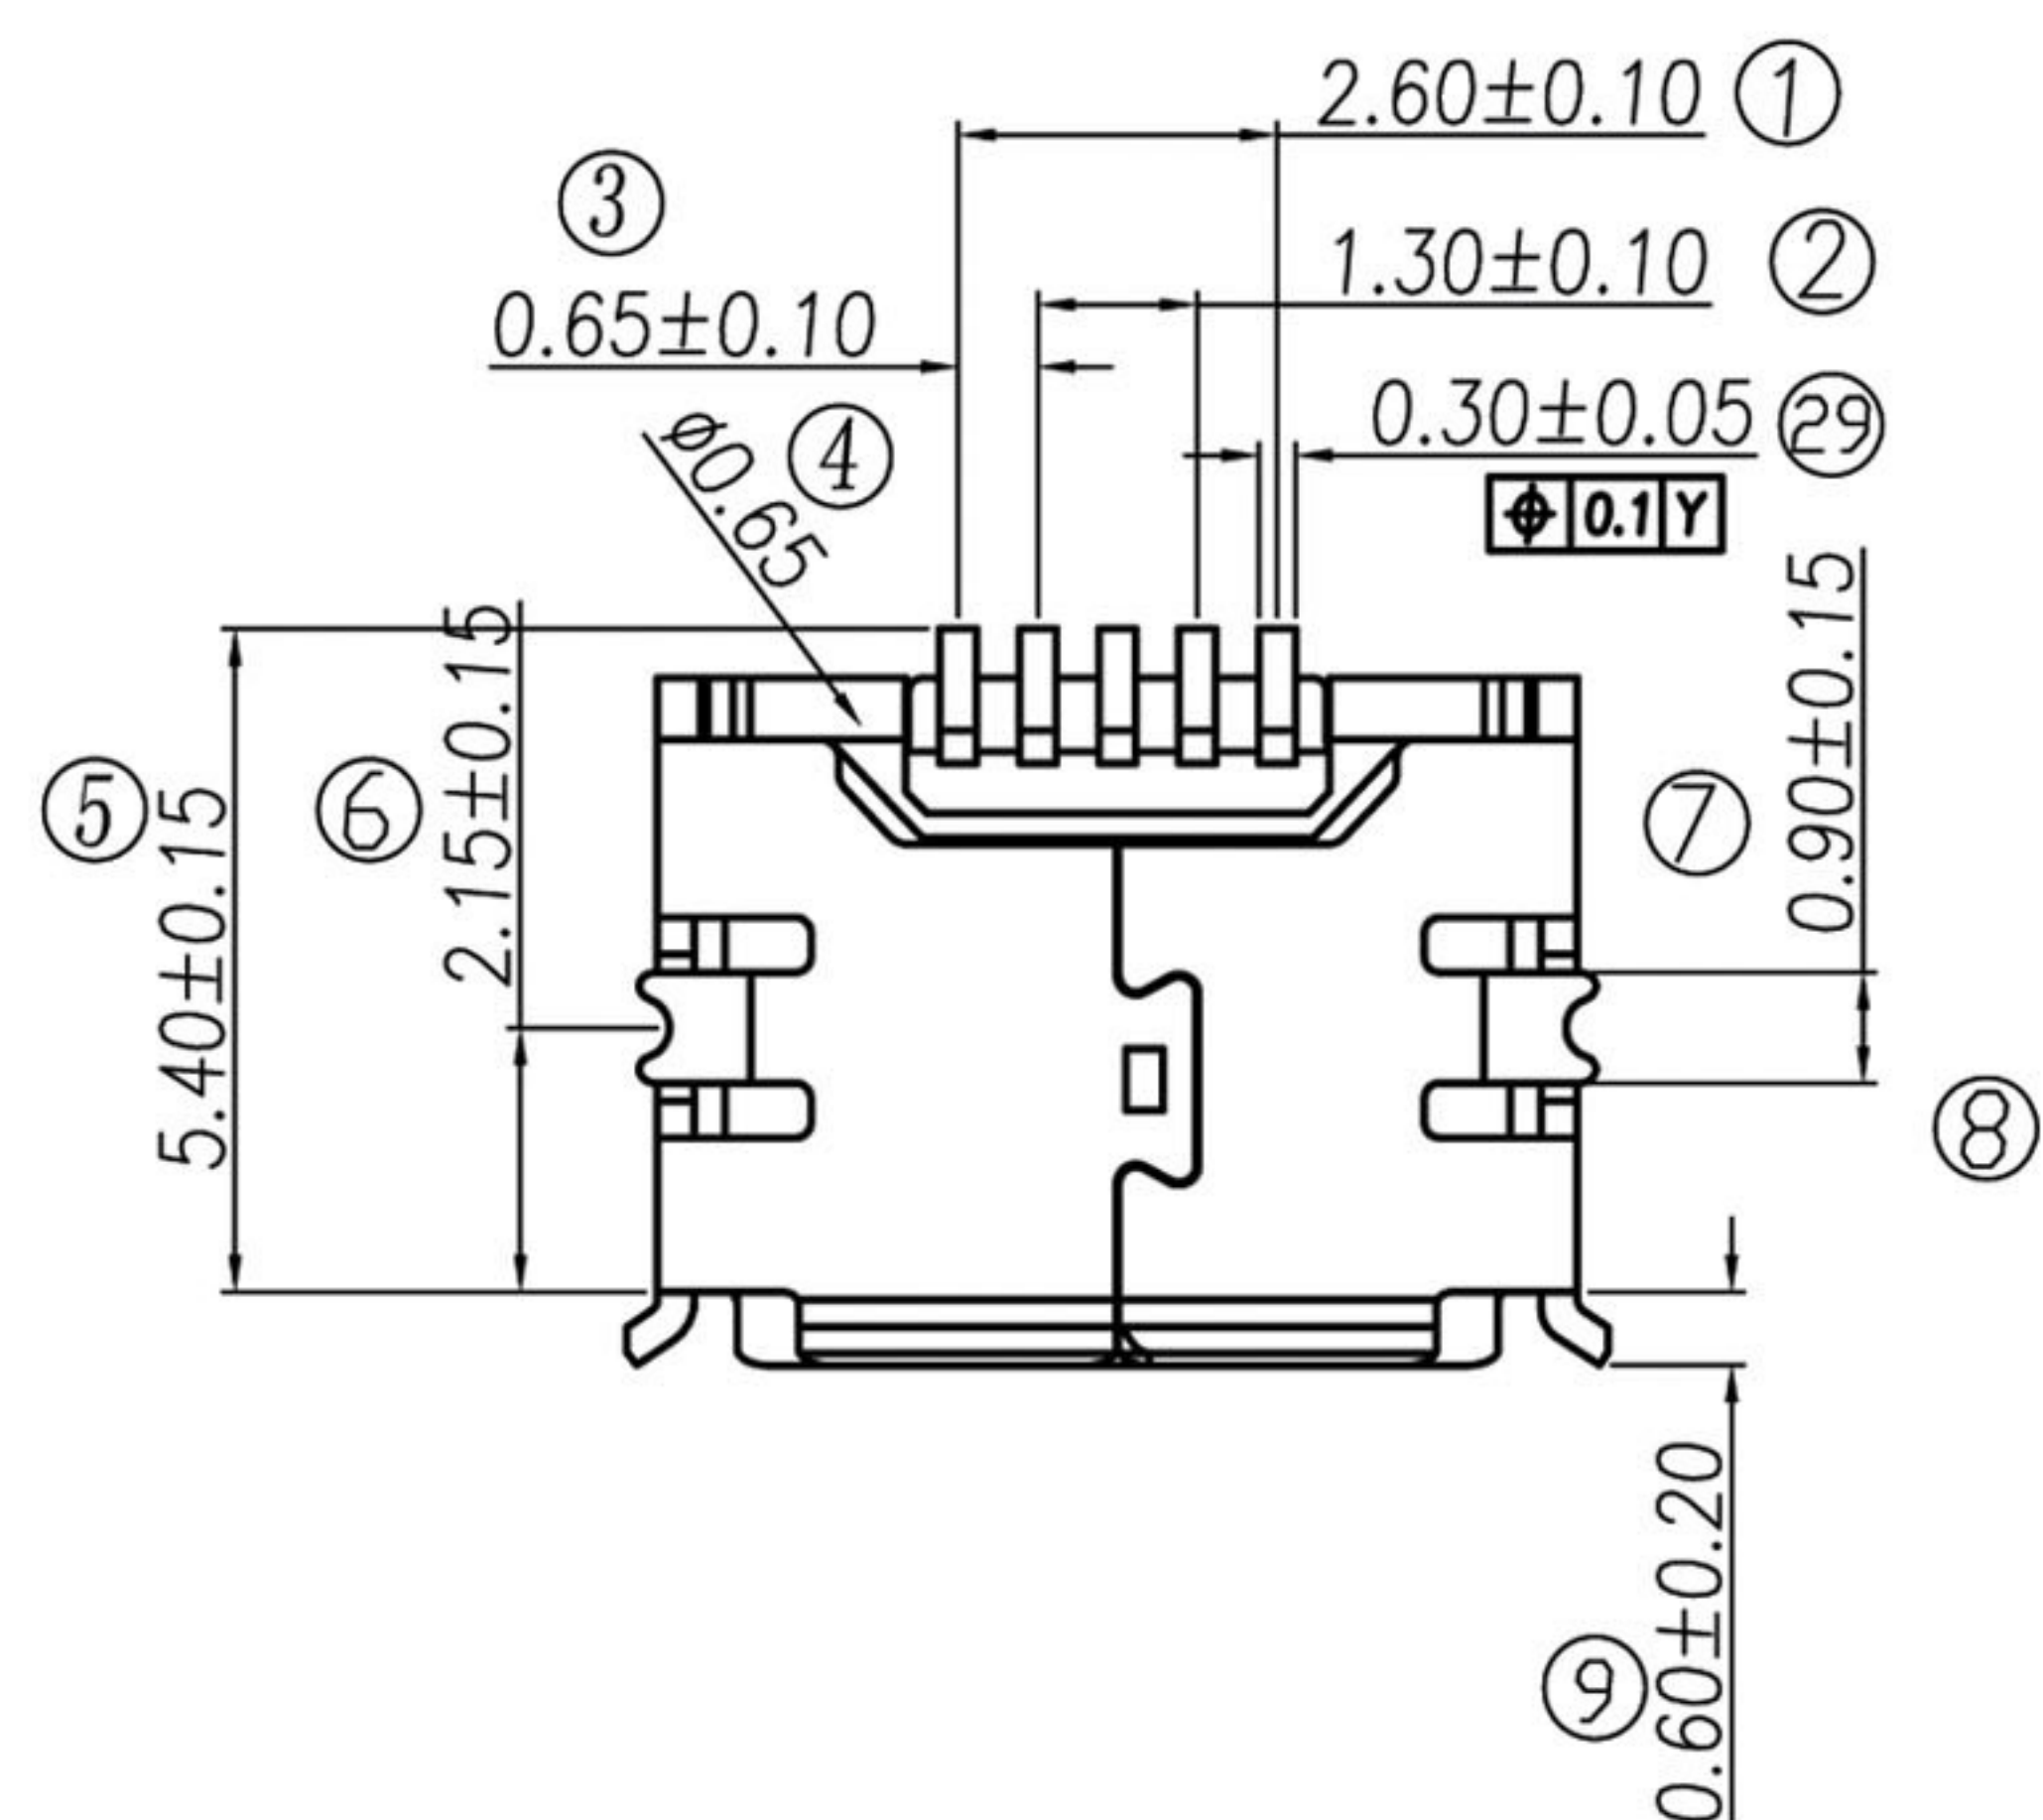

- NOTE:
- ELECTRICAL PROPERTIES:
 - CONTACT CURRENT RATING: 1.8A (ONLY PIN 1, 5) AT THE SAME TIME 0.5A AT CONTACT PIN 2, 3, 4 OTHER 1A (ONLY PIN 2, 3, 4).
 - CONTACT RESISTANCE: 30m Ohm MAX
 - INSULATION RESISTANCE: 100M Ohm MIN AT DC 500V.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 100V AC/1 MINUTE 10mA.
 - MATERIAL:
 - PIN: BRASS
 - HOUSING: LCP COLOR: BLACK
 - SHELL: Stainless Steel
 - PLATING:
 - PIN: UNDERPLATED 50u" MIN, NICKEL OVER ALL. 1u". 3u". 5u". 10u". 15u". 30u" GOLD ON CONTACT AREA. 100u" MIN, TIN ON SOLDER TAILS.
 - SHELL: 30~80u" , NICKEL OVER ALL.
 - Temperature range: -40°C ~ +85°C

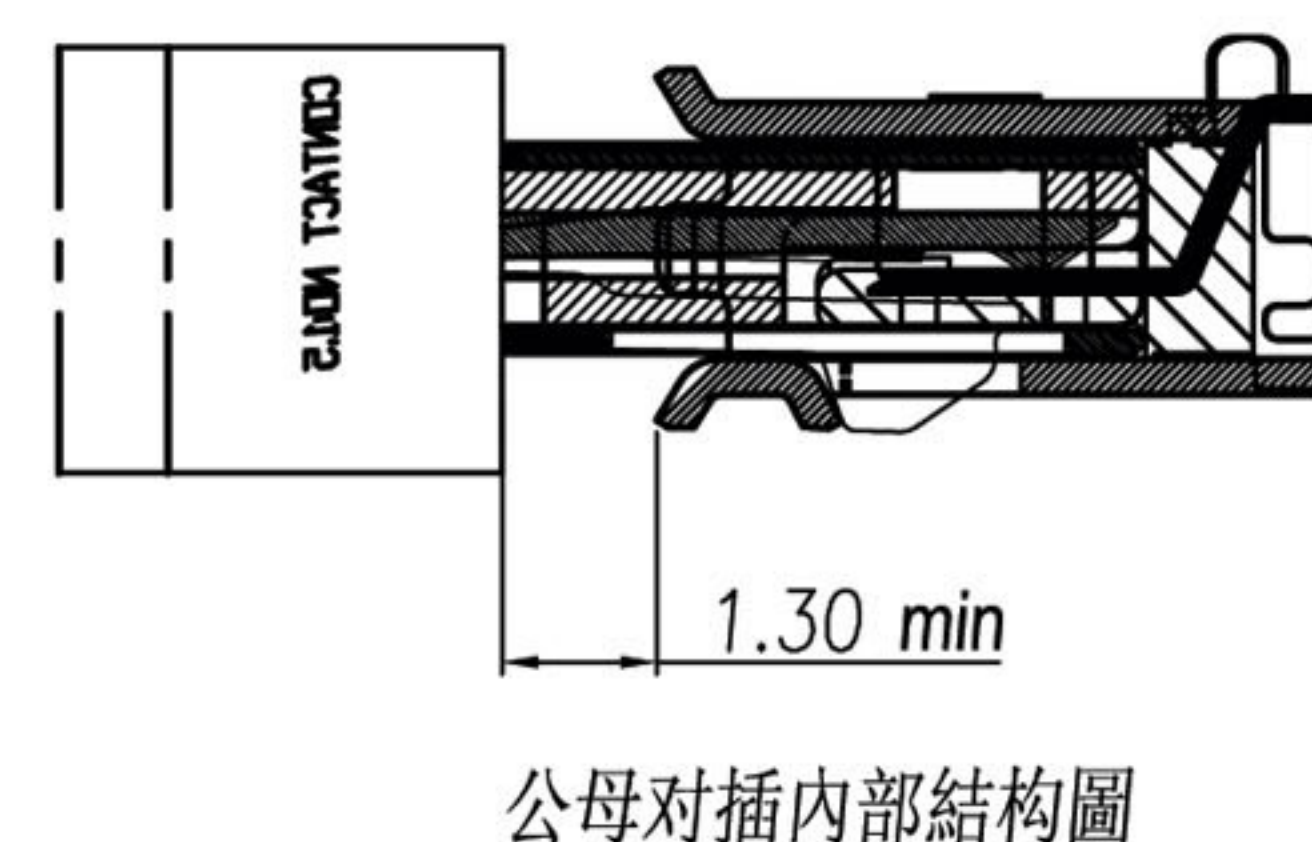

3	SHELL	1	Stainless steel	T=0.30±0.01mm	Nickel Plated	D4470XX
2	CONTACT	5	Brass	T=0.20±0.01mm	Gold Flashfd	JCH0147-B
1	HOUSING	1	LCP		Black	
No.	Part Name	Q'ty	Material	Thickness	Finish	Notes

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日

2010/12/02



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE UNSPECIFIED
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±5°

SIZE.
紙張尺寸 A4

REV.
版次 B

PART NAME 品名
Micro USB B TYPE FEMALE 5P SMT TYPE (P.C.B TYPE)
WITHOUT LOCATING PEG NICKEL SHELL SELECTIVE GOLD
BLACK INSULATOR HOUSING MATERIAL: LCP ROHS

PART NO.
料號