

POWER RELAY


1 POLE—5 A (CADMIUM FREE CONTACTS TYPE) NY SERIES

RoHS compliant



■ FEATURES

- Ultra slim type with 5 mm thickness
—Good for high density mounting
- Low power consumption and high sensitivity
—Nominal coil power: 120 mW
—Operating power: 54 mW
- UL, CSA, VDE recognized
- Conforms to IEC61010, 61131
- High isolation
—Surge voltage: 5,080V
—Dielectric strength: 3,000VAC (coil and contacts)
- SIL pitch terminals
- Plastic sealed type
- Compatible with solid state I/O module type SN (see page 376) in size and pin (terminal) arrangement
- Environmentally friendly cadmium free contact type
- RoHS compliant since date code: 0439C1
Please see page 6 for more information

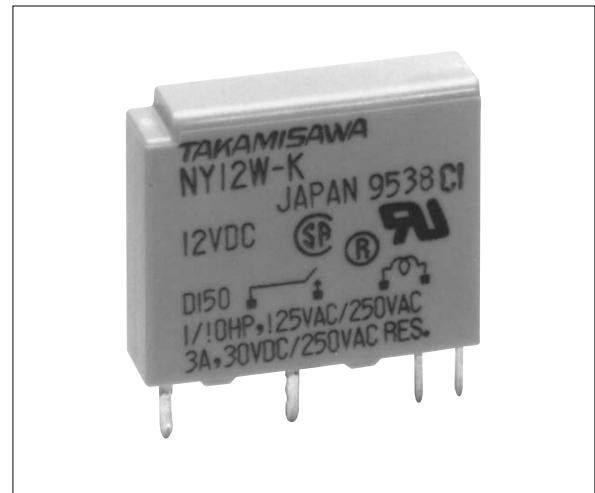

■ ORDERING INFORMATION

[Example] $\frac{NY}{(a)} \frac{P}{(b)} - \frac{12}{(*)} \frac{W}{(c)} - \frac{K}{(e)} - \frac{IE}{(*)}$

(a)	Series Name	NY: NY Series
(b)	Terminal Classification	Nil : PC board mounting type P : Socket mounting type
(c)	Nominal Voltage	Refer to the COIL DATA CHART
(d)	Contact	W : Bifurcated type
(e)	Enclosure	K : Plastic sealed type
(f)	Insulation	IE : Comply with IEC standard

Note: Actual marking omits the hyphen (-) and IE of (*)

■ SAFETY STANDARDS

Type	Compliance	Contact rating
UL	UL 508, UL 1604 E56140, E199193	Flammability: UL 94-V0 (plastics) 3A (General use) 5A, 250VAC/30 VDC (resistive)
CSA	C22.2 No. 14 LR 35579	1/8 HP, 250VAC /125VAC Pilot duty: C300

Also complies with VED, IEC 61010, 61131

■ SPECIFICATIONS

Item			NY
Contact	Arrangement		1 form A (SPST-NO)
	Material		Gold overlay silver alloy
	Configuration		Bifurcated
	Resistance (initial)		Maximum 30 mΩ (at 1 A 6 VDC)
	Rating (resistive)		3 A 250 VAC or 3 A 30 VDC
	Maximum Carrying Current		5 A
	Maximum Switching Power		750 VA, 90 W
	Maximum Switching Voltage		270 VAC, 150 VDC
	Maximum Switching Current		5 A
	Minimum Switching Load*1		1mA 5 VDC
Coil	Nominal Power (at 20°C)		120 mW
	Operate Power (at 20°C)		54 mW
	Operating Temperature		−40°C to +90°C (no frost) (refer to the CHARACTERISTIC DATA)
Time Value	Operate (at nominal voltage)		Maximum 10 ms
Life	Release (at nominal voltage)		Maximum 5 ms
	Mechanical		2 x 10 ⁷ operations minimum
	Electrical		1 × 10 ⁵ operations minimum (at 3A 250VAC, 30VDC resistive) 5 × 10 ⁴ operations minimum (at 5 A 250 VAC, 30 VDC resistive)
Other	Vibration Resistance	Misoperation	10 to 55 Hz (double amplitude of 1.5 mm)
		Endurance	10 to 55 Hz (double amplitude of 5.0 mm)
	Shock Resistance	Misoperation	100 m/s ² (11 ± 1 ms)
		Endurance	1,000 m/s ² (6 ± 1 ms)
	Weight		Approximately 3.5 g

*1 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

■ INSULATION

Item		NY	Note
Resistance (initial)		Minimum 1,000 MΩ	at 500 VDC
Dielectric Strength	open contacts	750 VAC 1 min.	
	coil and contacts	3,000 VAC 1 min.	
Surge Voltage		5,080 V	1.2 x 50μs standard wave


COIL DATA CHART

MODEL	Nominal voltage	Coil resistance ($\pm 10\%$)	Must operate voltage*	Must release voltage*	Nominal power
NY- 4.5 W-K-IE	4.5 VDC	169 Ω	3 VDC	0.45 VDC	120 mW
NY- 5 W-K-IE	5 VDC	208 Ω	3.35 VDC	0.5 VDC	120 mW
NY- 6 W-K-IE	6 VDC	300 Ω	4 VDC	0.6 VDC	120 mW
NY- 9 W-K-IE	9 VDC	675 Ω	6 VDC	0.9 VDC	120 mW
NY- 12 W-K-IE	12 VDC	1,200 Ω	8 VDC	1.2 VDC	120 mW
NY- 18W-K-IE	18 VDC	2,700 Ω	12.1VDC	1.8 VDC	120 mW
NY- 24 W-K-IE	24 VDC	4,800 Ω	16.1 VDC	2.4 VDC	120 mW







Note: All values in the table are measured at 20°C

*: Specified values are subject to pulse wave voltage

CHARACTERISTIC DATA

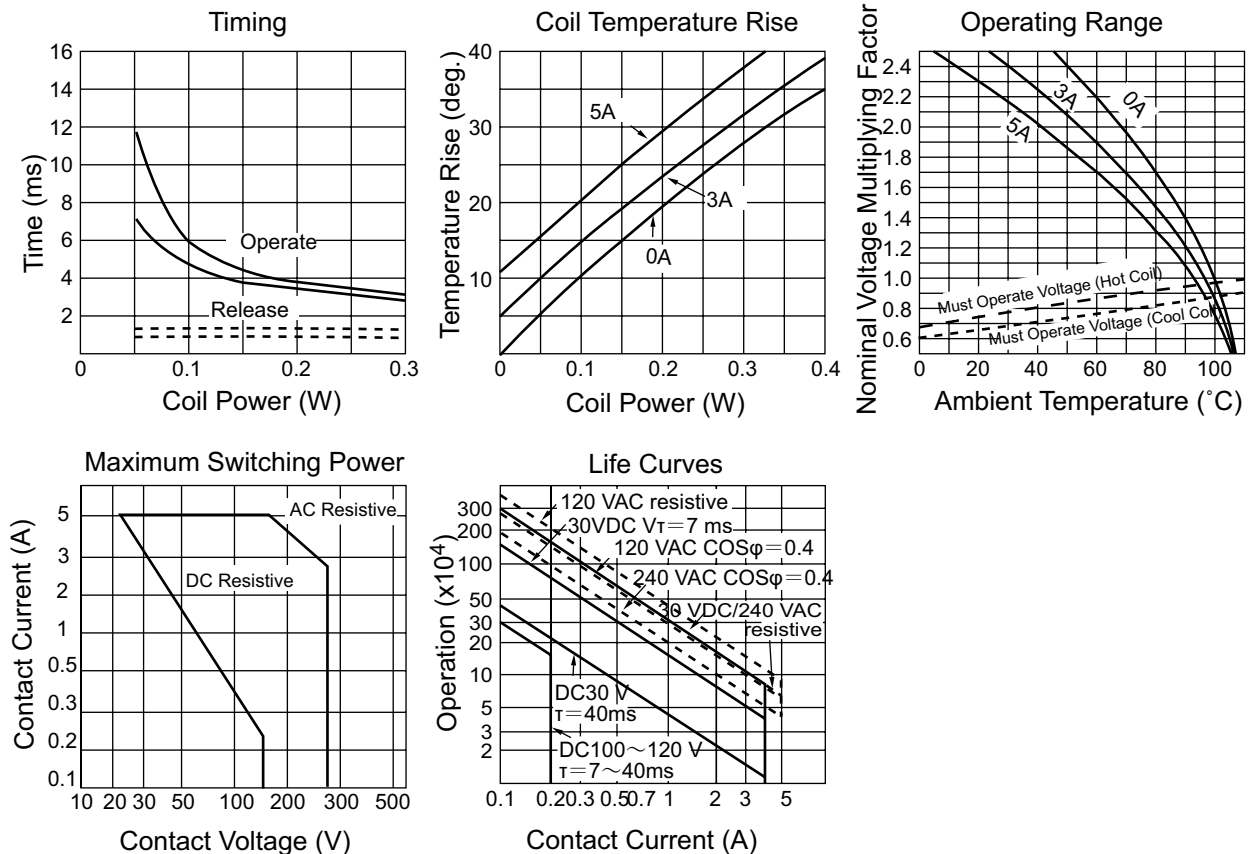

■ REFERENCE DATA

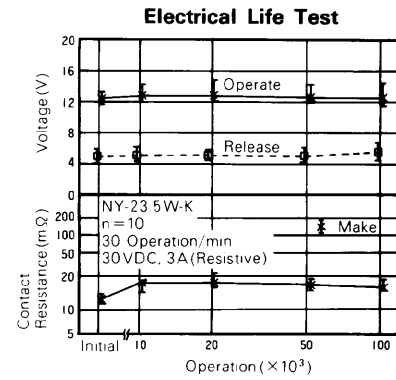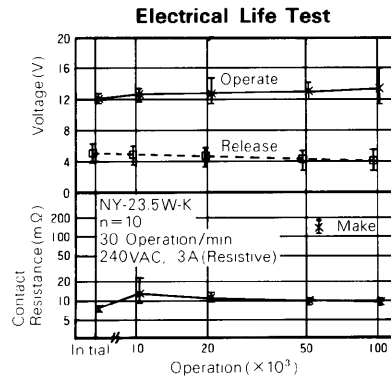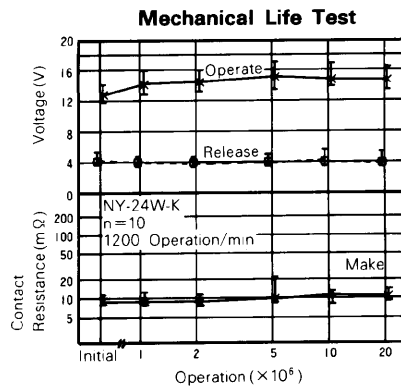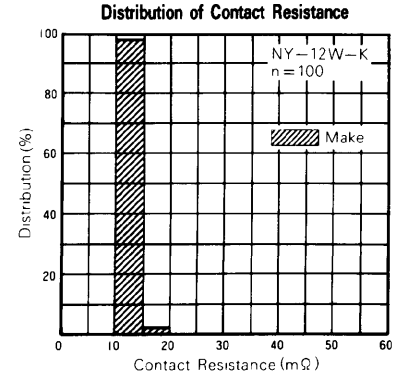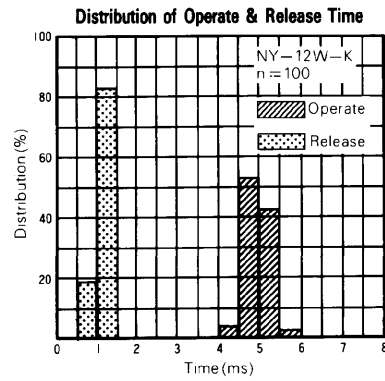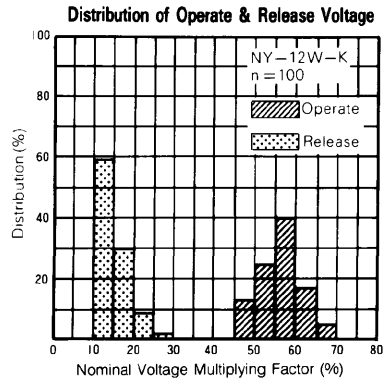


NY SERIES


■ DIMENSIONS

● Dimensions


NY type

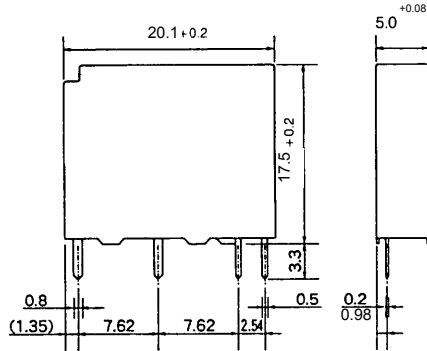



NYP type

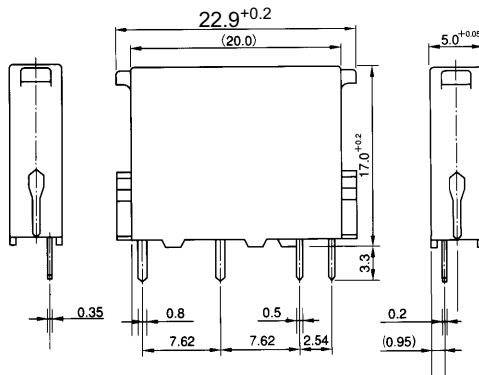

● Schematics (BOTTOM VIEW)




● PC board mounting hole layout (BOTTOM VIEW)

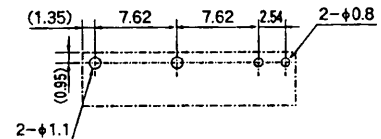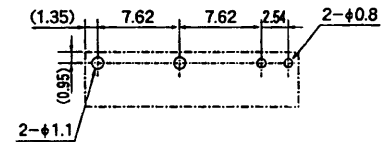


Unit: mm

■ SOCKET DIMENSIONS

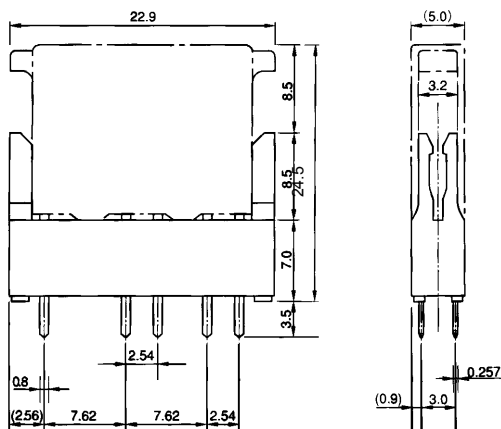

■ SOCKET DRILLING PLANT



Unit: mm

■ NOTES

1. Socket ordering code. JL-5N
2. Standard IC socket is not recommended.
Please use socket JL-5N.

RoHS Compliance and Lead Free Relay Information

1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in lead assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid lead relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship lead relays as long as the lead relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

Reflow Solder condition

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141 8630, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@fcl.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2007 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. July 19, 2007.